


## Dielectric Bandpass Filter

15.00L x 10.00W x 4.25H (mm)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Center Frequency	Fo			1227.6		MHz
Frequency Range			1212.6		1242.6	
Insertion Loss (Fo)		@ 25°C			4.1	dB
		@ -55°C to +105°C			4.3	
Insertion Loss in BW		@ 25°C			5.1	dB
		@ -55°C to +105°C			5.3	
Ripple in BW		@ 25°C			0.9	dB
		@ -55°C to +105°C			1.0	
Return Loss			13.0			dB
Group Delay		@ 1227.6 MHz	24.0	27.0	30.0	nS
Group Delay Ripple		@ 1215.6 MHz to 1239.6 MHz (@ 25°C)			11.0	nS
		@ 1215.6 MHz to 1239.6 MHz (@ -55°C to +105°C)			12.0	
Attenuation		@ 0.1 MHz to 1175.6 MHz (@ 25°C)	55.0			dB
		@ 25°C	55.0			
		@ 0.1 MHz to 1175.6 MHz (@ -55°C to +105°C)	55.0			
		@ 1279.6 MHz to 2100.0 MHz (@ -55°C to +105°C)	55.0			
Power Handling					2.0	W
Terminating Impedance		In/Out		50		Ω
Operating Temperature			-40		+105	°C
Storage Temperature			-55		+125	°C



**Tape and Reel**

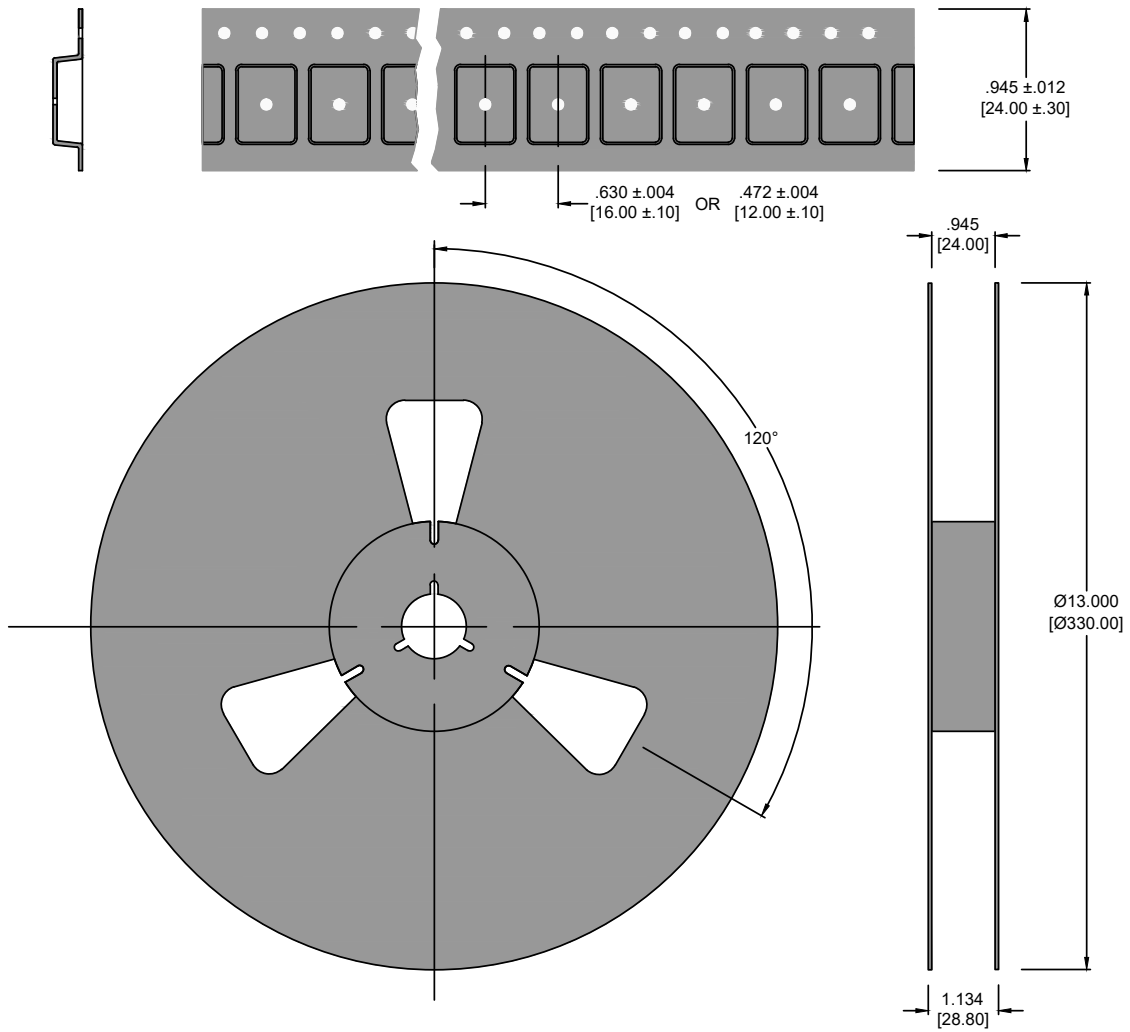

**Reflow Profile**

